


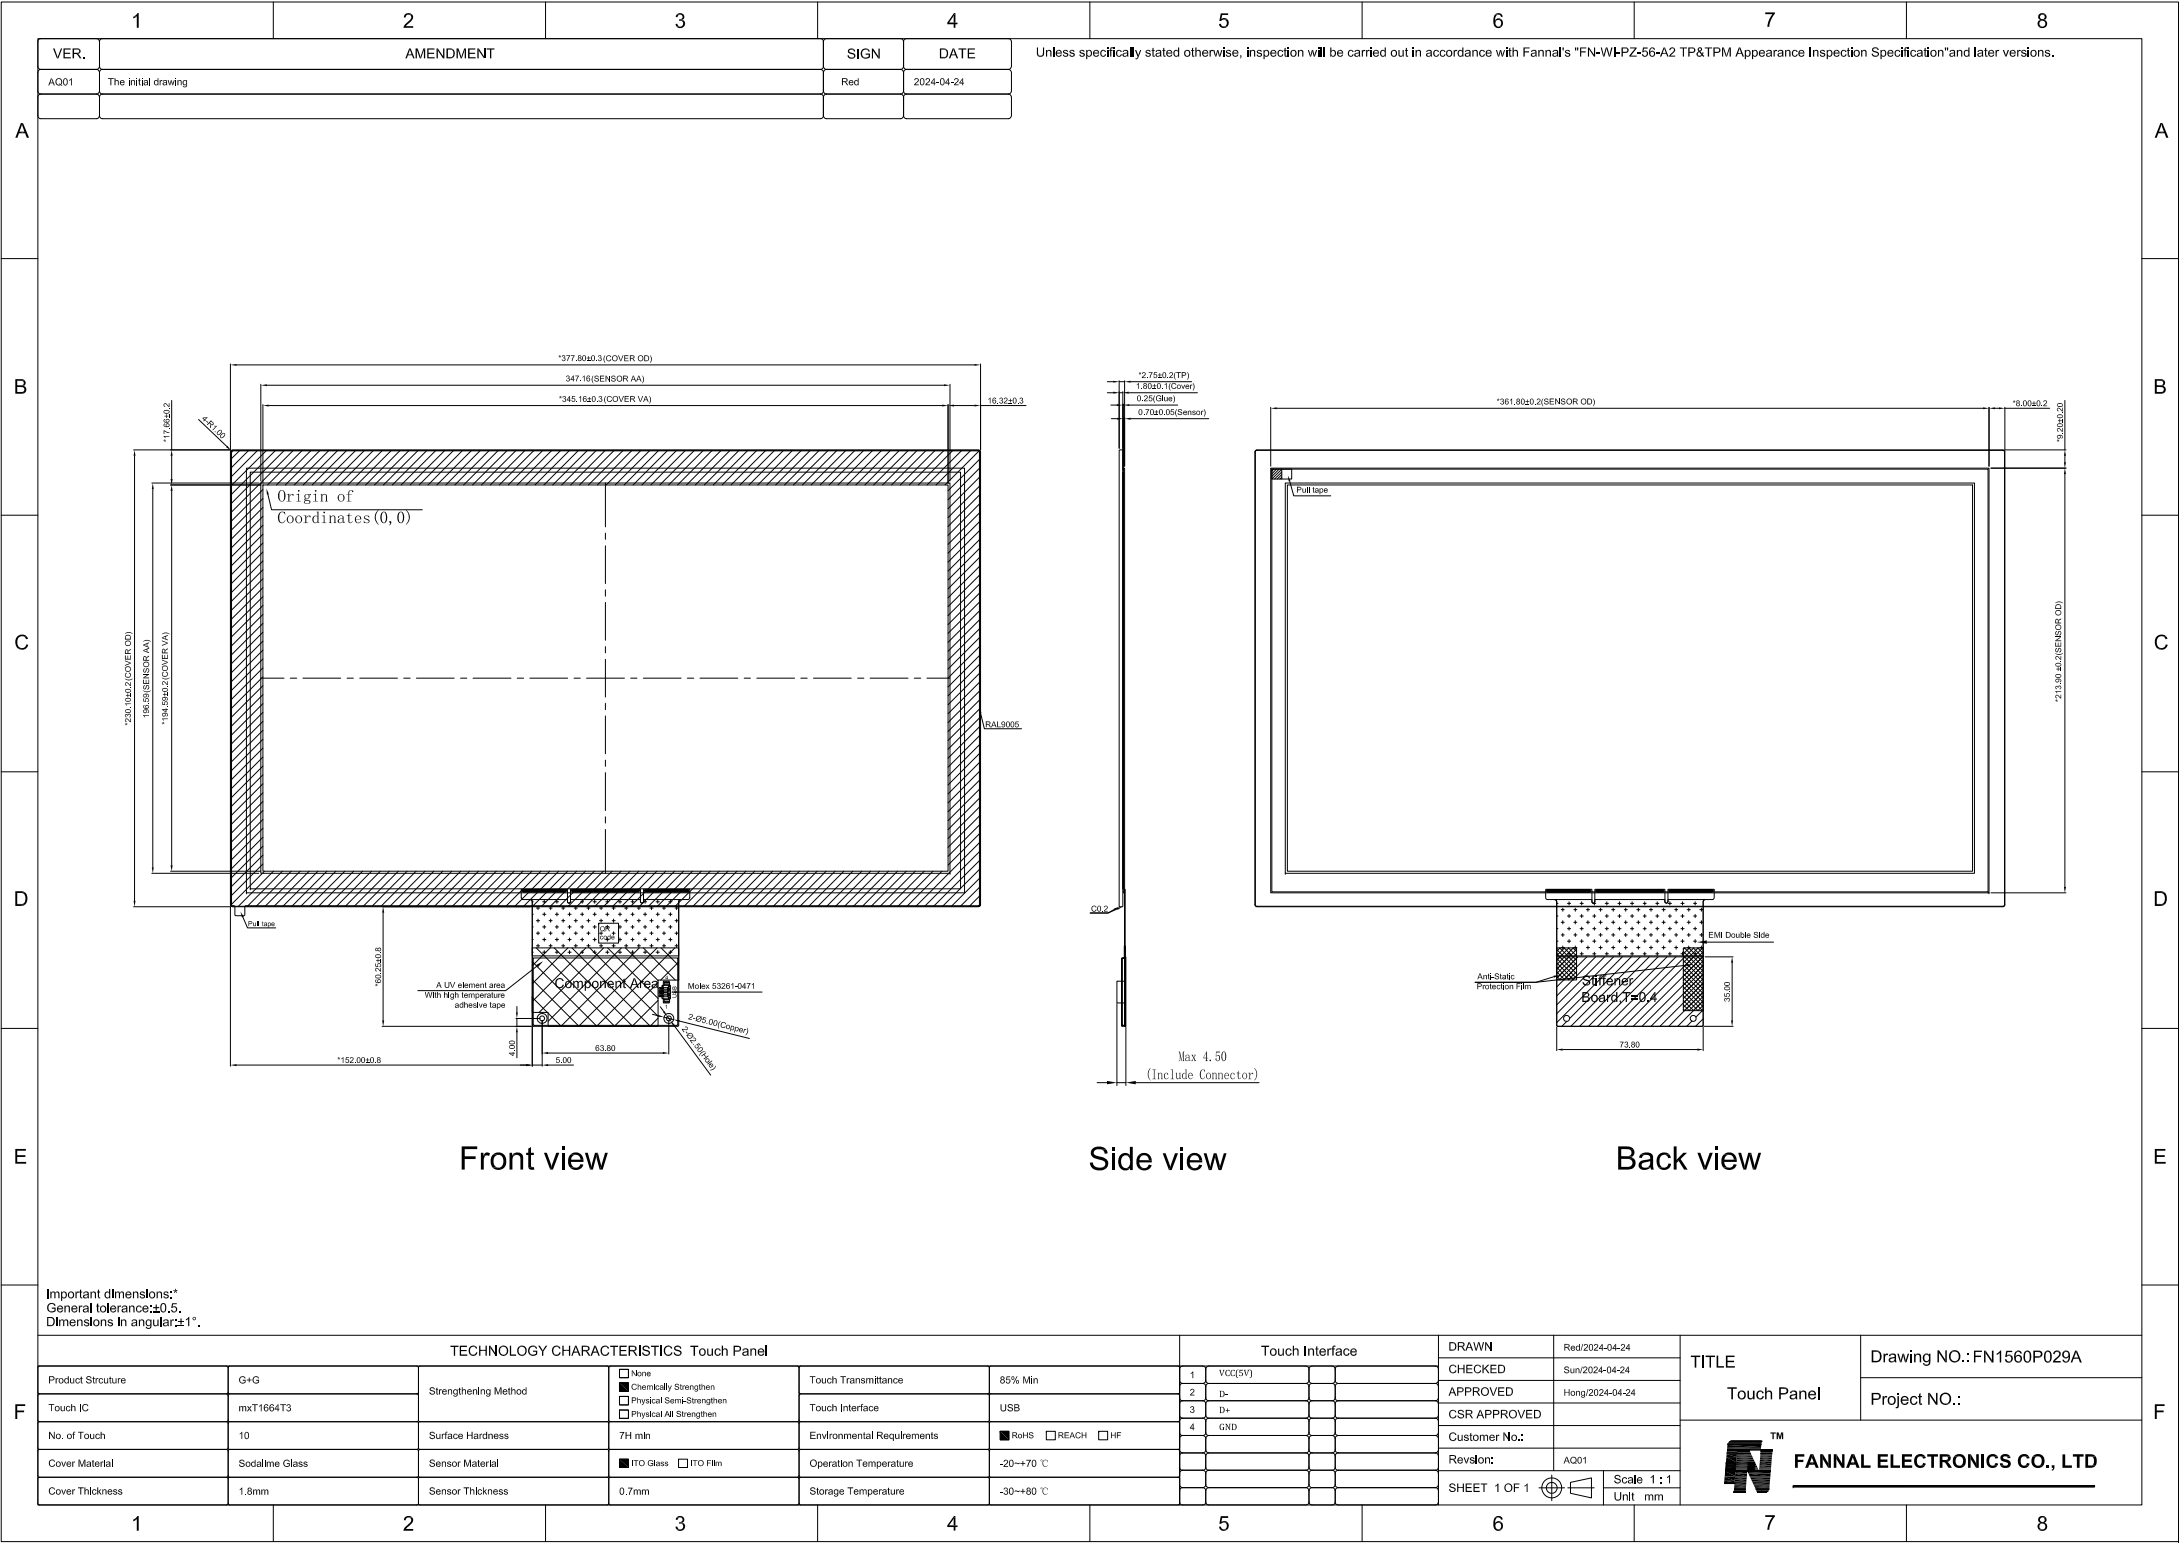

Important dimensions:
General tolerance: ±0.5.
Dimensions in angular: ±1°.

TECHNOLOGY CHARACTERISTICS Touch Panel						Touch Interface			DRAWN	Red/2024-04-24	TITLE Touch Panel	TM FANNAL ELECTRONICS CO., LTD
Product Structure	G+G	Strengthening Method	☐ None ☒ Chemically Strengthen ☐ Physical Semi-Strengthen ☐ Physical All Strengthen	Touch Transmittance	85% Min	1	VCC(5V)		CHECKED	Sun/2024-04-24		
Touch IC	mxT1664T3			Touch Interface	USB	2	D-		APPROVED	Hong/2024-04-24		
No. of Touch	10	Surface Hardness	7H min	Environmental Requirements	☒ RoHS ☐ REACH ☐ HF	3	D+		CSR APPROVED			
Cover Material	Sodalime Glass	Sensor Material	☒ ITO Glass ☐ ITO Film	Operation Temperature	-20→+70 ℃	4	GND		Customer No.:			
Cover Thickness	1.8mm	Sensor Thickness	0.7mm	Storage Temperature	-30→+80 ℃				Revision:	AQ01		
									SHEET 1 OF 1	Scale 1 : 1 Unit mm		